



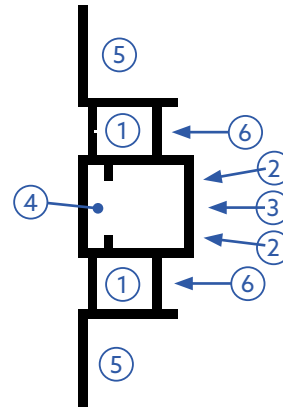

**Additional support profile for vertical use, effective width 22mm: 22 mm.**



1	FACAFIX screw channel, horizontal and diagonal (30°)
2	Double-sided adhesive zone
3	Visual centre line
4	Zone for connector / spacer
5	Screw lips for auxiliary structures & double support structures
6	Screw direction

The BFP-220 profile has been developed **for vertical use** in combination with Facafix facade screws (all diameters). This profile has a **working width of 22 mm** and is suitable for facade systems that **do not require a wide vertical support structure, or as an intermediate support for wide facade cladding.**

The pre-formed channels for the Facafix facade screws have also been developed and tested (tensile tests) for these profiles to ensure perfect thread engagement and adhesion between the Facafix screw and the aluminium profile. The FACAFIX screw channels on this profile are used **for both the horizontal Facafix facade screws and the diagonal Facafix facade screws (30°)**. Facade cladding requiring a wider profile can use the **alternative BFP-210 or BFP-220 profile.**

Using the **connector pieces/spacers (BFA-501)**, these profiles can be coupled together seamlessly to ensure straightness. These connector pieces/spacers (BFA-501) also ensure a guaranteed gap of 10 mm **to accommodate expansion.**

This profile is available in standard lengths or cut to size, pre-anodized black or unfinished. The profiles can be custom-machined for specific projects using CNC machining. Please contact our services if required.

<b>BFP-220</b>	Sawing length (mm)	No treatment	Anodisation black	Standard CNC processed
BFP-220-B6500	6500	•		
BFP-220-B3250	3250	•		
BFP-220-ANB6500	6500		•	
BFP-220-ANB3250	3250		•	